

Statistical Signal Processing

Problem #1

$$(a) \hat{P}_{xx}(f) = \frac{1}{K} \sum_{k=0}^{K-1} \left\{ \frac{1}{LU} \left| \sum_{n=0}^{L-1} w(n) x_k(n) e^{-j2\pi fn} \right|^2 \right\}$$

where: L = segment length

$w(n)$ = window function (e.g. Hanning, Hamming, Kaiser-Bessel, etc.)

$x_k(n)$ = k^{th} segment where n is defined within the segment $0 \leq n \leq L-1$

$$U = \frac{1}{L} \sum_{n=0}^{L-1} w^2(n)$$

K = number of segments of length L (segments may overlap - if segments are adjacent with no overlap then $N = LK$ where N is the total length of the data record)

$$(b) E[\hat{P}_{xx}(f)] = \frac{1}{K} \sum_{k=0}^{K-1} \left\{ \frac{1}{LU} E \left[\left| \sum_{n=0}^{L-1} w(n) x_k(n) e^{-j2\pi fn} \right|^2 \right] \right\}$$

$$\text{since } E \left[\left| \sum_{n=0}^{L-1} w(n) x_k(n) e^{-j2\pi fn} \right|^2 \right]$$

$$= \sum_{n=0}^{L-1} \sum_{m=0}^{L-1} w(n) w(m) E[x_k(n) x_k(m)] e^{-j2\pi fn} e^{j2\pi fm}$$

$$= \sqrt{w}^2 \sum_{n=0}^{L-1} w^2(n) = \sqrt{w}^2 S(n-m)$$

$$\text{and } LU = \sum_{n=0}^{L-1} w^2(n)$$

Then

$$E[\hat{P}_{xx}(f)] = \sqrt{w}^2$$

Note: 2-sided power spectrum

(c) The use of the window function is to provide sidelobe control (minimize spectral leakage).

Small K (large L) has the best frequency resolution since the DFT (Discrete Fourier Transform) is taken over longer segments of the time series.

Large K (small L) has the smallest variance since the variance of $\hat{P}_{xx}(f)$ decreases as the number of segments K increases.

(d) $x(n) = A \sin(2\pi fn)$ and goes through an integer number of cycles in L points.

$$X_k(f) = \sum_{n=0}^{L-1} w(n) x_R(n) e^{-j2\pi fn}$$

where k is a segment index and the segment length is L .

Recall $\sin(2\pi fn) = \frac{e^{j2\pi fn} - e^{-j2\pi fn}}{2j}$

Thus, substituting the expression for $x(n)$

$$|X_k(f)| = \frac{A}{2} \sum_{n=0}^{L-1} w(n) \implies A = \frac{2}{\sum_{n=0}^{L-1} w(n)} |X_k(f)|$$

$$\text{Sinusoid power} = \frac{A^2}{2} = \frac{2}{\left(\sum_{n=0}^{L-1} w(n)\right)^2} |X_k(f)|^2$$

and is the same for all k .


$$\text{Since } \hat{P}_{xx}(f) = \frac{1}{K} \sum_{k=0}^{K-1} \frac{1}{LU} |X_k(f)|^2 \quad (\text{2-sided power spectrum})$$

$$\text{Then Sinusoid power} = \frac{A^2}{2} = \frac{2}{\left(\sum_{n=0}^{L-1} w(n)\right)^2} |X_k(f)|^2 = \frac{2}{\left(\sum_{n=0}^{L-1} w(n)\right)^2} \left\{ LU \hat{P}_{xx}(f) \right\}$$

$$= \frac{2}{L} \left\{ \frac{L \sum_{n=0}^{L-1} w^2(n)}{\left(\sum_{n=0}^{L-1} w(n)\right)^2} \right\} \hat{P}_{xx}(f) \quad \text{since } LU = \sum_{n=0}^{L-1} 2$$

Problem #2

(a)

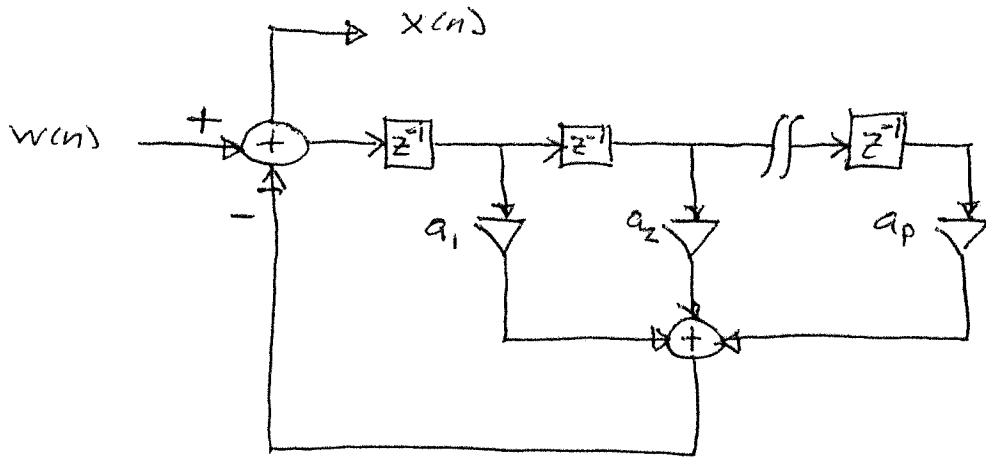

$$x(n) = w(n) - \sum_{i=1}^p a_i x(n-i)$$


$$H(z) = \frac{1}{\sum_{i=0}^p a_i z^{-i}} \quad a_0 = 1$$

$$= \frac{z^p}{\sum_{i=0}^p a_i z^{p-i}} \quad a_0 = 1$$

$$(b) \quad P_{xx}(f) = \sqrt{\frac{2}{w}} \left| H(z) \right|_{z=e^{j2\pi f}}^2$$

$$= \frac{\sqrt{\frac{2}{w}}}{\left| \sum_{i=0}^p a_i e^{-j2\pi f i} \right|^2} \quad a_0 = 1$$

(c) one-step forward linear predictor of $x(n)$

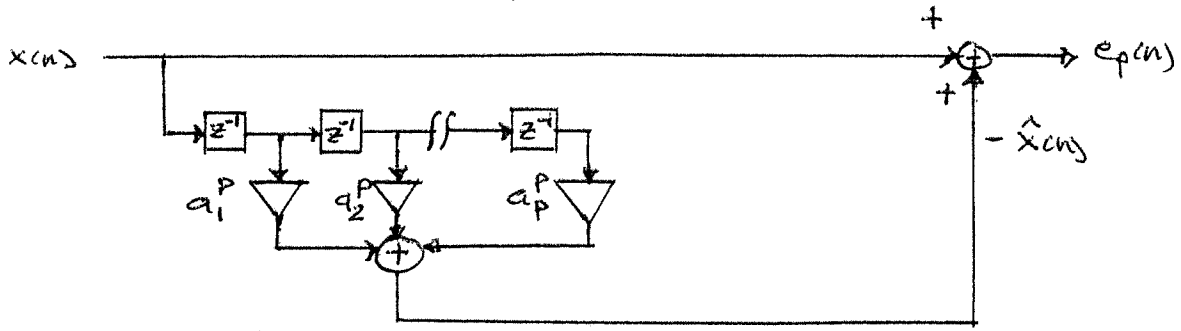

Problem: $\min_{\underline{a}^p} E [e_p^2(n)]$

Define $\underline{a}^p = \begin{bmatrix} a_1^p \\ a_2^p \\ \vdots \\ a_p^p \end{bmatrix}$ $\underline{x}^-(n) = \begin{bmatrix} x(n-1) \\ x(n-2) \\ \vdots \\ x(n-p) \end{bmatrix}$

$\phi(m) = E [x(n)x(n+m)] = \phi(-m)$

$\underline{\phi} = E [x(n) \underline{x}^-(n)] = \begin{bmatrix} \phi(1) \\ \phi(2) \\ \vdots \\ \phi(p) \end{bmatrix}$

$\underline{\Phi} = E [\underline{x}^-(n) \underline{x}^-(n)^T] = \begin{bmatrix} \phi(0) & \dots & \phi(p-1) \\ \vdots & \ddots & \vdots \\ \phi(p-1) & \dots & \phi(0) \end{bmatrix}$

Since $x(n)$ is wide sense stationary, $\underline{\Phi}$ is Toeplitz and is completely defined by its upper row $\phi(m)$, $m=0, 1, \dots, p-1$. Since $x(n)$ is real, $\underline{\Phi}$ is symmetric, $\underline{\Phi} = \underline{\Phi}^T$.

$$e_p(n) = x(n) + \sum_{i=1}^p a_i^p x(n-i)$$

$$= x(n) + \underline{a}^p \underline{x}^T(n)$$

$$e_p^2(n) = (x(n) + \underline{a}^p \underline{x}^T(n))^2$$

$$= (x(n) + \underline{a}^p \underline{x}^T(n)) (x(n) + \underline{x}^T(n) \underline{a}^p)$$

$$= x^2(n) + z \underline{a}^p \underline{x}^T(n) \underline{x}^T(n) + \underline{a}^p \underline{x}^T(n) \underline{x}^T(n) \underline{a}^p$$

$$E[e_p^2(n)] = \sigma_x^2 + z \underline{a}^p \underline{g} + \underline{a}^p \underline{\Phi} \underline{a}^p$$

minimizing $E[e_p^2(n)]$ with respect to \underline{a}^p leads to

$$0 = \underline{g} + \underline{\Phi} \underline{a}^p \quad \text{or} \quad \underline{\Phi} \underline{a}^p = -\underline{g}$$

Solving for \underline{a}^p :

$$\underline{a}^p = -\underline{\Phi}^{-1} \underline{g}$$

(d) Forward prediction error power

$$E_p = \min_{\underline{a}^p} E[e_p^2(n)] = \sigma_x^2 + z \underline{a}^p \underline{g} + \underline{a}^p \underline{\Phi} (-\underline{\Phi}^{-1} \underline{g})$$

$$= \sigma_x^2 + \underline{a}^p \underline{g} = \phi(\omega) + \underline{a}^p \begin{bmatrix} \phi(1) \\ \phi(2) \\ \vdots \\ \phi(p) \end{bmatrix}$$

(e) From the solution in (c), $\underline{a}^p = -\underline{g}$

$$\begin{bmatrix} \phi(0) & \dots & \phi(p-1) \\ \vdots & \ddots & \vdots \\ \phi(p-1) & \dots & \phi(0) \end{bmatrix} \begin{bmatrix} a_1^p \\ a_2^p \\ \vdots \\ a_p^p \end{bmatrix} = - \begin{bmatrix} \phi(1) \\ \phi(2) \\ \vdots \\ \phi(p) \end{bmatrix}$$

Adding $[\phi(1) \ \phi(2) \ \dots \ \phi(p)]^T$ to both sides yields

$$\begin{bmatrix} \phi(1) & \phi(0) & \dots & \phi(p-1) \\ \phi(2) & \phi(1) & & \phi(p-2) \\ \vdots & \vdots & \ddots & \vdots \\ \phi(p) & \phi(p-1) & \dots & \phi(0) \end{bmatrix} \begin{bmatrix} 1 \\ a_1^p \\ a_2^p \\ \vdots \\ a_p^p \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$

lastly, augmenting the above with the expression for E_p

$$\begin{bmatrix} \phi(0) & \phi(1) & \dots & \phi(p) \\ \phi(1) & \phi(0) & \dots & \phi(p-1) \\ \vdots & \vdots & \ddots & \vdots \\ \phi(p) & \phi(p-1) & \dots & \phi(0) \end{bmatrix} \begin{bmatrix} 1 \\ a_1^p \\ \vdots \\ a_p^p \end{bmatrix} = \begin{bmatrix} E_p \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$